


IP-EALK10B31C

QSFP+ 40Gb/s LR4 10km With DDM

PRODUCT FEATURES

- Supports 41.2 Gb/s aggregate bit rates
- Uncooled 4x10Gb/s transmitter
- Maximum link length of 10km on Single Mode Fiber (SMF)
- Hot-pluggable QSFP+ footprint
- Duplex LC receptacles
- Power dissipation<3.5W
- RoHS-6 compliant and lead-free
- Single 3.3V power supply
- Support Digital Diagnostic Monitor interface
- Case operating temperature

Commercial: 0°C to +70°C

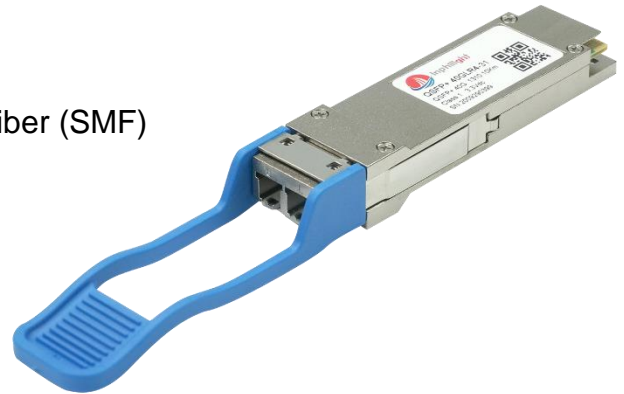

APPLICATIONS

- 40GBASE-LR4Ethernet

Compliance

- QSFP+ MSA.
- IEEE802.3ba
- SFF-8436
- RoHS

PRODUCT DESCRIPTION

IP-EALK10B31C QSFP+ transceiver modules are designed for use in 40 Gigabit Ethernet links over single-mode fiber. They are compliant with the QSFP+ MSA and IEEE 802.3ba 40GBASE-LR4. Module-level digital diagnostic functions are available via an I²C interface, as specified by the QSFP+ MSA. The optical transceiver is compliant per the RoHS Directive 2011/65/EU.

Contact Information

Inphilight Technology (WuHan) Co., Ltd

Inphi (WuHan) Opto tech Co., Ltd

ADD: Building 5, Zone E, Guangguxin Center, No.52, Road liufang, Jiangxia district, Wuhan, Hubei, China

Should you need more details about datasheet, contact us, pls.

Revision History

| Version No. | Date | Description |
|-------------|---------------|-----------------------|
| 1.0 | June 24, 2019 | Preliminary datasheet |

Prurchase service: prurchase@inphitech.com

Support service: support@inphitech.com

Warranty service: warranty@inphitech.com